



FITTING GUIDE

SUPERRIP POINTS

COMPATIBLE WITH ALL MAJOR MACHINE BRANDS


THE LEADER IN LONGEVITY

AGRITUF points go the distance. Ensure proper fitting for the best results.



STEP ONE

Slide the ripper point onto the shank, lining up the bolt holes.

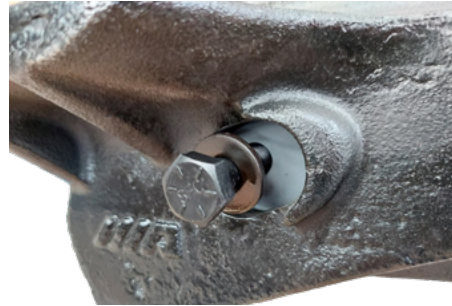

STEP TWO

Fit the bolt through the lined up holes of the point and shank.



STEP THREE

Ensure that a washer is present on each end of the bolt and fasten securely with a nut, retaining the ripper point onto the shank.



STEP FOUR

Place the shank protector on the shank, lining up the top and bottom bolt holes.



STEP FIVE

Install a roll pin through each of the two holes, securing the shank protector onto the shank.

NOTE

The washers shouldn't press against the point and should fit within the cavity of the casting.

MAKE AGRITUF DO THE HARD YARDS

**BOLT THREE POINTS ONTO YOUR
MACHINE, AND PUT THEM IN
HIGH WEAR AREAS - THEN YOU'LL
SEE WHY THEY ARE THE BEST.**

- 1** Point one - in the centre
- 2** Point two - behind the wheel
- 3** Point three - outside edge





SUPERRIP POINTS PRODUCT CARE GUIDE

GENERAL CARE

Our superior performance is thanks to our unique chromium blend. To keep AGRITUF points performing at their peak, keep these in mind.

DON'T DROP THEM

Avoid dropping AGRITUF points on hard surfaces - our points have been designed for point first soil penetrations.

CARE WHEN LOWERING

Pay attention when lowering the machine on uneven surfaces where weight distribution onto a point(s) might cause damage.

DON'T OVER TIGHTEN

Caution when tightening with a impact gun. Do not over tighten.

MAINTAIN EQUIPMENT


While AGRITUF points go further than our competitors, they do still wear. To get the best results, make sure you're regularly checking and maintaining equipment.

EVEN TORQUE

Torque up bolts evenly with double bolt hole castings.

AGRITUF.COM

 **FACEBOOK.COM/AGRITUF**

 **INSTAGRAM.COM/AGRITUF**