

CREATING A CLEANER, SAFER, HEALTHIER WORLD.





COMPACT, RAPID DRYING CARPET CLEANER

Go places you haven't gone before – with ReadySpace[®] technology

- Turn congested areas quickly with patented ReadySpace technology for carpet that is clean, dry, and ready for use in less than 30 minutes
- Clean compact spaces easily with ultra-low profile, compact design
- Quietly clean with true OSHA recognized 69 dBA sound level

CARPETS CLEANED WITH READYSPACE® TECHNOLOGY ARE DRY AND READY FOR FOOT TRAFFIC IN LESS THAN 30 MINUTES



CLEAN, HEALTHY ENVIRONMENTS

ReadySpace technology helps reduce mold and bacteria growth and leaves clean, healthy spaces while using up to 80% less water and leaving up to 90% less water in the carpet.

INCREASE PRODUCTIVITY IN TIGHT SPACES

Clean with ease in tight, congested areas, such as office spaces, with forward and reverse cleaning action. The ultra low profile design and Insta-Adjust[™] handle extends your cleaning reach under low-profile desks and tables.

EASY TO FILL AND EMPTY TANKS


Easy to fill, empty, and clean Hygenic[®] lift-off tanks offer a unique compact design. Ergonomic handles and grips ensure easy pick up.

BEAUTIFULLY CLEAN, ALWAYS READY CARPET SPACES

Improve carpet appearance and luster with ReadySpace technology's exclusive soil transfer rollers that lift and remove the dirt vacuuming leaves behind. The results are exceptional:

- Keep high-traffic areas looking new with frequent cleanings.
- Reduce chemical build up to help prevent resoiling.
- Reduce risk of slip-and-fall incidents when transitioning from just cleaned carpet to hard floors.

INSIDE THE

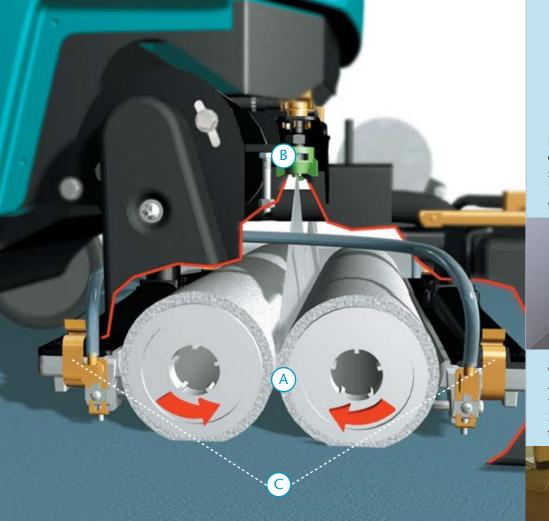

PATENTED READYSPACE® TECHNOLOGY

Unique soil-transfer rollers are the basis for ReadySpace. When damp, these fabric rollers grab dirt from the carpet fibers and lift it into the machine.

Inside, a sprayer rinses soil from the rollers, not the carpet.

B

Two powerful individual vacuum shoes transfer the dirty water into the recovery tank.



More than clean, it's ReadySpace®

FROM CLEAN TO CROWD IN MINUTES.

Reopen spaces sooner with ReadySpace technology.

First Shift

6:30 AM – Cleaning crew finishes cleaning small office space with Tennant R3. **7:00** AM – Carpet is clean, dry, and ready for office traffic.



Check In 2:30 PM – Housekeeping finishes cleaning the hotel room with Tennant R3. 3:00 PM – Carpet is clean, dry, and ready for guest check in.



Store Open
8:30 AM – Mall maintenance finishes cleaning stores.
9:00 AM – Carpet is clean, dry, and ready for shoppers.



TENNANT*TRUE®* PARTS, SERVICE AND FINANCE SOLUTIONS

- Reduce rework, labor and safety costs by using only Tennant*True* parts and service.
- Ensure optimal cleaning performance by selecting a Tennant*True* Service program provided by a network of over 400 factorytrained Tennant service representatives.
- Improve uptime by leveraging Tennant*True* parts and service.
- Simplify budgeting by bundling Tennant*True* service plans, including parts, into the purchase or financing of your machine.

R3 COMPACT, RAPID-DRYING CARPET CLEANER

CLEANING SYSTEM

Structure BRUSH DRIVE SYSTEM Roller motor (2) Roller speed A50 rpm Roller size (dual cylindrical) Solution system Solution tank capacity S gal / 19 L Solution tank capacity S gal / 19 L Solution system Solution systems Solution systems Solution systems Solution system sealed waterlift Power cord Sol ft / 15 m MACHINE SPECIFICATIONS* Length 30 in / 760 mm Width 19 in / 480 mm Height 28 in / 710 mm Weight 117 lb / 53 kg Sound level (operator's ear) 69 dBA		
Roller motor (2)0.3 hp / 0.22 kW 450 rpmRoller speed450 rpmRoller size (dual cylindrical)15 in / 380 mmSOLUTION SYSTEMSolution tank capacity5 gal / 19 L 65 psi / 4.48 bar 0.2 gpm / 0.76 lpmRECOVERY SYSTEMRecovery tank capacity5 gal / 19 L 2-stage, 1.2 hp / 2-stage, 0.89 kV 99 cfm / 2.8 m³/min 86 in / 2,180 mmPOWER SYSTEMPOWER SYSTEMPOWER SYSTEMPOWER SYSTEMPOWER SYSTEMPower cord50 ft / 15 mMACHINE SPECIFICATIONS*Length30 in / 760 mm 19 in / 480 mm 28 in / 710 mm 117 lb / 53 kg Sound level (operator's ear)ACCESSORIES	Cleaning path	15 in / 380 mm
Roller speed 450 rpm Roller size (dual cylindrical) 15 in / 380 mm SOLUTION SYSTEM Solution tank capacity 5 gal / 19 L Solution pump pressure 65 psi / 4.48 bar Solution spray rate 0.2 gpm / 0.76 lpm RECOVERY SYSTEM Recovery tank capacity 5 gal / 19 L Vacuum fan 2-stage, 1.2 hp / 2-stage, 0.89 kW Vacuum system sealed waterlift 86 in / 2,180 mm POWER SYSTEM 86 in / 2,180 mm POWER SYSTEM 30 in / 760 mm MACHINE SPECIFICATIONS* 30 in / 760 mm Length 30 in / 760 mm Width 19 in / 480 mm Height 28 in / 710 mm Weight 117 lb / 53 kg Sound level (operator's ear) 69 dBA	BRUSH DRIVE SYSTEM	
Solution tank capacity5 gal / 19 LSolution pump pressure65 psi / 4.48 barSolution spray rate0.2 gpm / 0.76 lpmRECOVERY SYSTEM5 gal / 19 LRecovery tank capacity5 gal / 19 LVacuum fan2-stage, 1.2 hp / 2-stage, 0.89 kVVacuum motor airflow (max)99 cfm / 2.8 m³/minVacuum system sealed waterlift86 in / 2,180 mmPOWER SYSTEMPOWER SYSTEMPower cord50 ft / 15 mMACHINE SPECIFICATIONS*30 in / 760 mmLength30 in / 760 mmWidth19 in / 480 mmHeight28 in / 710 mmWeight117 lb / 53 kgSound level (operator's ear)69 dBA	Roller motor (2) Roller speed Roller size (dual cylindrical)	450 rpm
Solution pump pressure65 psi / 4.48 bar 0.2 gpm / 0.76 lpmRECOVERY SYSTEMRecovery tank capacity5 gal / 19 L 2-stage, 1.2 hp / 2-stage, 0.89 kV 99 cfm / 2.8 m³/min 86 in / 2,180 mmVacuum motor airflow (max)99 cfm / 2.8 m³/min 86 in / 2,180 mmPOWER SYSTEMPOWER SYSTEMPower cord50 ft / 15 mMACHINE SPECIFICATIONS*Length30 in / 760 mm 19 in / 480 mmWidth19 in / 480 mm 	SOLUTION SYSTEM	
Recovery tank capacity5 gal / 19 LVacuum fan2-stage, 1.2 hp / 2-stage, 0.89 kVVacuum motor airflow (max)99 cfm / 2.8 m³/minVacuum system sealed waterlift86 in / 2,180 mmPOWER SYSTEMPower cord50 ft / 15 mMACHINE SPECIFICATIONS*Length30 in / 760 mmWidth19 in / 480 mmHeight28 in / 710 mmWight117 lb / 53 kgSound level (operator's ear)69 dBA	Solution tank capacity Solution pump pressure Solution spray rate	65 psi / 4.48 bar
Vacuum fan 2-stage, 1.2 hp / 2-stage, 0.89 kV Vacuum motor airflow (max) 99 cfm / 2.8 m³/min Vacuum system sealed waterlift 86 in / 2,180 mm POWER SYSTEM 50 ft / 15 m MACHINE SPECIFICATIONS* 30 in / 760 mm Length 30 in / 760 mm Width 19 in / 480 mm Height 28 in / 710 mm Weight 117 lb / 53 kg Sound level (operator's ear) 69 dBA	RECOVERY SYSTEM	
Power cord 50 ft / 15 m MACHINE SPECIFICATIONS* Length 30 in / 760 mm Width 19 in / 480 mm Height 28 in / 710 mm Weight 117 lb / 53 kg Sound level (operator's ear) 69 dBA ACCESSORIES	Recovery tank capacity Vacuum fan Vacuum motor airflow (max) Vacuum system sealed waterlift	2-stage, 1.2 hp / 2-stage, 0.89 kW 99 cfm / 2.8 m³/min
Length30 in / 760 mmWidth19 in / 480 mmHeight28 in / 710 mmWeight117 lb / 53 kgSound level (operator's ear)69 dBAACCESSORIES	Power cord	50 ft / 15 m
Width19 in / 480 mmHeight28 in / 710 mmWeight117 lb / 53 kgSound level (operator's ear)69 dBAACCESSORIES	MACHINE SPECIFICATIONS*	
	Length Width Height Weight Sound level (operator's ear)	19 in / 480 mm 28 in / 710 mm 117 lb / 53 kg
Ontional tools available	ACCESSORIES	
	Optional tools available.	

WARRANTY

See your local representative for warranty information

*Dimensions are measured with handle folded flat for storage. Specifications subject to change without notice.

Choose GE Capital or U.S. Bancorp, our leasing providers, for simple, quick financing with flexible upgrade options.



Carpet and Rug Institute (CRI) Seal of Approval – Certified Bronze.

SEEING IS BELIEVING

BioShine

190 Summerhill Rd * Spotswood, NJ 08884 Phone: (732)-251-9506 * Fax (732)-251-9586 Info@Bio-Shine.com * Shop.Bio-Shine.com Tennant 701 North Lilac Drive Minneapolis, MN 55422 USA

USA/Canada: +1.800.553.8033 Quebec: +1.800.361.9050 Overseas: +1.763.540.1315

www.tennantco.com info@tennantco.com